NMEA Compass Installation Diagram


Software Version 1.01

NMEA 0183 (EIA-422-A) Input:

$--HDG,x.x,,,,*hh<CR><LF>

Power requirements:

12 Volts nominal (10 - 18 Volts)
<50 mA
protect with 250 mA fuse

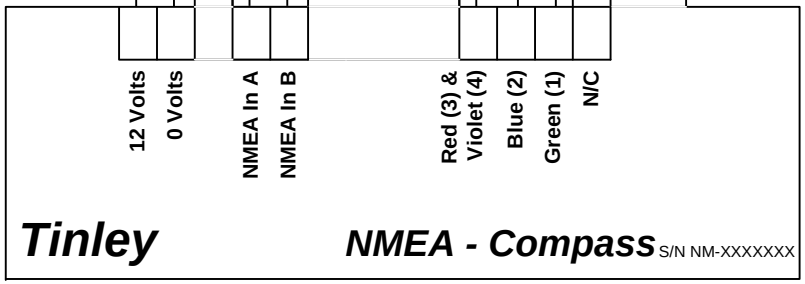

B&G Synchro connections

Model	Pointer	Card
Red & Violet	(3&4)	(2&3)
Blue	(2)	(4)
Green	(1)	(1)

12 Volts lighting can be connected to 5 & 6

Tinley Electronics Limited
235 Bentley Way
Lymington SO41 8JW
England

© Tinley Electronics Ltd. 2006-2013
This drawing may not be copied or reproduced in any form or by any means without the prior written consent of Tinley Electronics Ltd.

Tel: +44 (0) 1590 610071
Fax: +44 (0) 1590 610072
e-mail: electronics@tinley.net
Website: www.tinleyelectronics.com